

Specification


Stainless Steel 2 Pce Full Port Ball Valve
Screwed BSP in accordance with ANSI B2.1
BS 21-1973, DIN 259/2999, ISO 228

Pressure / Temperature

Maximum pressure 1000 PSI (69 BAR)W.O.G.
Working temperature refer graph (as shown)

Features

Blow-out proof stem / Full Port / Locking Handle

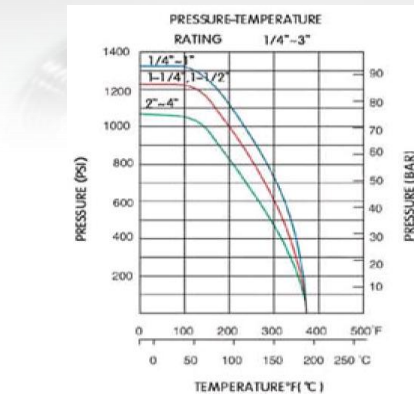

| | |
|--------|----------------|
| BODY | ASTM-A351-CF8M |
| CAP | ASTM-A351-CF8M |
| BALL | ASTM-A351-CF8M |
| SEAT | PTFE |
| STEM | AISI 316 |
| HANDLE | AISI 304 |
| BOLT | AISI 304 |
| NUT | AISI 304 |

| | |
|---------------|----------|
| THUST WASHER | PTFE |
| STEM PACKING | PTFE |
| GLAND NUT | AISI 304 |
| STEM WASHER | AISI 304 |
| STEM NUT | AISI 304 |
| PLASTIC COVER | PLASTIC |
| LOCK DEVICE | AISI 304 |
| JOINT GASKET | PTFE |

Valve Dimensions

| Size | mm | 10 | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 |
|------|------|------|------|------|-----|--------|--------|-----|--------|-----|-----|
| | inch | 3/8" | 1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3" | 4" |
| d | | 12.8 | 15 | 20 | 25 | 32 | 38 | 50 | 65 | 80 | 100 |
| L | | 49 | 57 | 65 | 78 | 90.5 | 105 | 127 | 160 | 180 | 220 |
| H | | 51 | 55 | 59 | 73 | 78 | 91 | 99 | 130 | 142 | 165 |
| W | | 96 | 96 | 110 | 135 | 135 | 165 | 165 | 215 | 215 | 310 |



MATTHEW DAVIS Australia P/L

102 - 104 Malcolm Road, Braeside, Victoria, 3195

Telephone: (03) 9580 0066 Facsimile: (03) 9587 2829

Web: www.matthewdavis.com.au Email: sales1@matthewdavis.com.au